


Dimensions

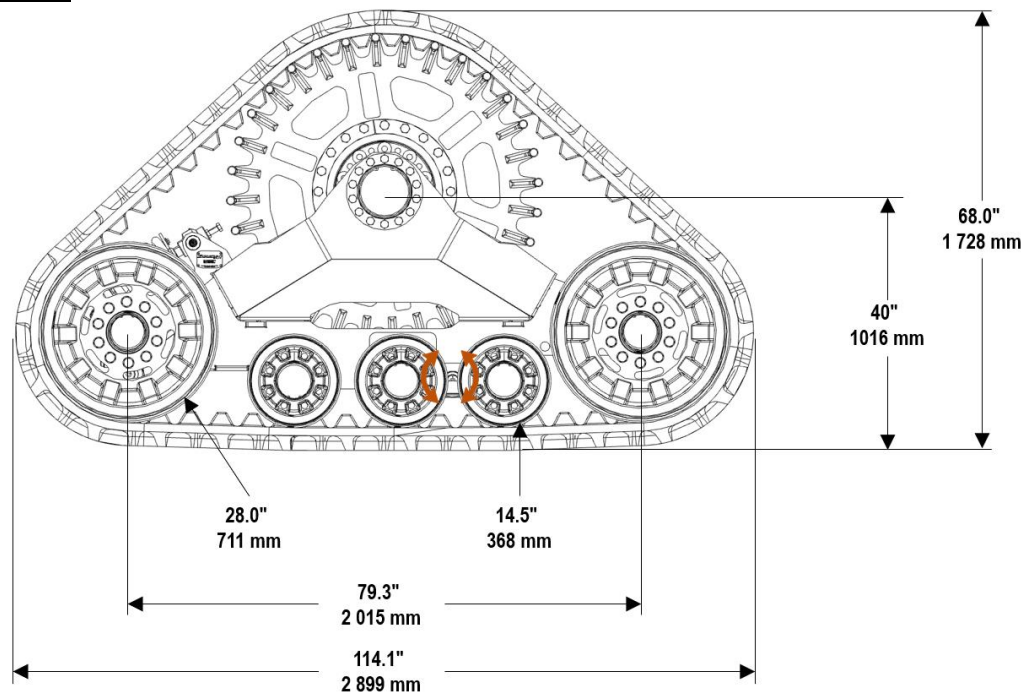

Compatibility

- Compatible with Case IH, Claas, John Deere and New Holland combines.
 - Other makes may be compatible. Check dimensions for compatibility.
- Long axle extensions required to prevent body interference.

Features (standard)

- Large footprint in a shorter undercarriage – 2 855 sq. in (1.84 m²) per track
- 36" wide track
- Centered main axle design minimizes leverage on final drives
- Rear midroller pair on walking tandem to follow ground contours and improve ride
- Spring track tensioner
- Oil bath hubs with metal face seals and clear cap.
- UHMW plastic midrollers and idler wheels.
- One-piece welded undercarriage frame for easy cleaning

Load & speed rating

- Designed for large combines – up to 65 000 lb (29 500 kg) axle load capacity
- Maximum speed – combine with 25 mph (40 kph) transmission: 17.5 mph (28 km/h) depending on tire size and transmission settings.

Maintenance

- Zero daily or weekly maintenance required. Annual oil change on wheel hubs and 3 greasing points per undercarriage.



- Complete track system weight – excluding adapter: approximately 4 950 lb (2 245 kg) per track unit

Shipping (for reference only – do not quote transport based on this information)

- Total shipping weight: approximately 10 000 lb (4 540 kg)
- Packaging:
 - 2 individual track units (shrinkwrapped) 115" x 70" x 36"
 - 1 box (optional – models with adapters) 51" x 41" x 12"

Installation

- Installation time: approximately 2 man-hours (minimum 2 persons recommended for easy installation).
- Bolt-on system.
- No adapter required on John Deere combines; adapter must be ordered for other makes.
- No specialized tools or lifting equipment required. Torque wrench required.